



# P-LIGHT Maxi XL 10A anpassad för utrustning


**Batterikapacitet:** 45Ah  
**Spänning:** 24V  
**Laddning:** 10A  
**Max samtidigt uttag:** 270W (11A)  
**Kraftuttag (PTO):** Solenoid Max 100A, Relä Max 50A

P-LIGHT skall seriekopplas i belysningskretsen



<b>S</b>	VBG/15-pin ISO 12098	
<b>LK</b>	+24V	12/9
<b>ÄO</b>		
<b>PN</b>		
<b>VT</b>		
<b>AA</b>	Gnd(-)	1/4
<b>GK</b>		
<b>NT</b>	58L	5/5
<b>S</b>	58R	6/6

<b>Kabelarea inkoppling P-LIGHT:</b>	
In	
3.	2,5 mm <sup>2</sup>
4.	2,5 mm <sup>2</sup>
6.	2,5 mm <sup>2</sup>
Ut	
5.	Max 100W
7.	Max 100W
9.	Max 200W
30,31 och 32.	Max 200W
34.	Jordpunkt kraft (PTO)
41.	Kraftuttag (PTO)
	Solenoid max 100A eller Relä max 50A

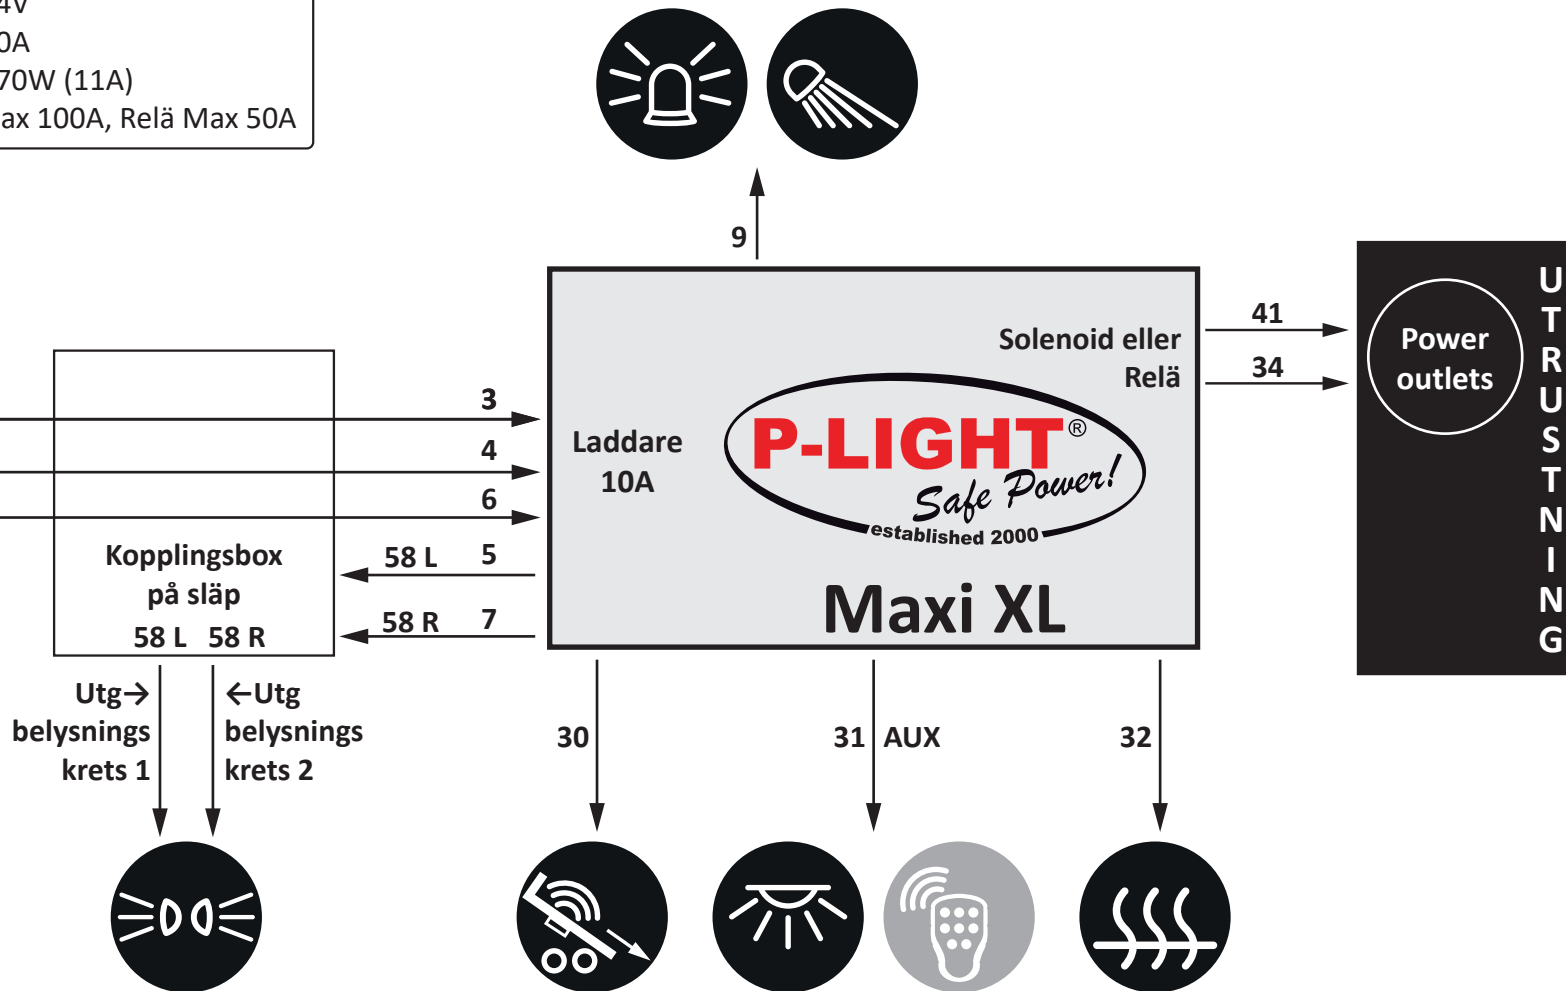

UTRUSTNING